


Stoplama Pimi

Sertlik : HRC38-44

Malzeme : Alloy Steel

Gerilim Dayanıklılığı (En Az) : 1220N/mm²

ISO 7379

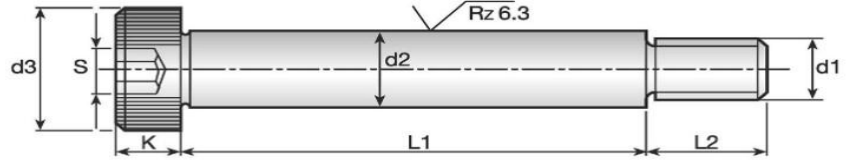

| d1 | M5 | M6 | M8 | M10 | M12 | M16 | |
|-----------|------|-------|-------|-------|-------|-------|---|
| d2 | 6mm | 8mm | 10mm | 12mm | 16mm | 20mm | |
| d3 | 10 | 13 | 16 | 18 | 24 | 30 | |
| K | 4,5 | 5,5 | 7 | 9 | 11 | 14 | |
| L2 | 9,75 | 11,25 | 13,25 | 16,40 | 18,40 | 22,40 | |
| S (ALLEN) | 3 | 4 | 5 | 6 | 8 | 10 | |
| BOY L1 | 10 | * | | | | | |
| | 12 | * | * | | | | |
| | 16 | * | * | * | | | |
| | 20 | * | * | * | * | | |
| | 25 | * | * | * | * | | |
| | 30 | * | * | * | * | * | |
| | 35 | * | * | * | * | * | |
| | 40 | * | * | * | * | * | * |
| | 45 | * | * | * | * | * | * |
| | 50 | * | * | * | * | * | * |
| | 55 | | * | * | * | * | * |
| | 60 | | * | * | * | * | * |
| | 65 | | * | * | * | * | * |
| | 70 | | * | * | * | * | * |
| | 80 | | * | * | * | * | * |
| 90 | | * | * | * | * | * | |
| 100 | | | * | * | * | * | |
| 120 | | | | * | * | * | |

